



### Android APP user manual

1 : Turn the power on for the mower, connect the smartphone to the local area network.  
Note:Check robot lawn mower WIFI signal "MiotLinkAp\_XXXX", wait a few seconds until the device "MiotLinkAp\_XXXX"shows.

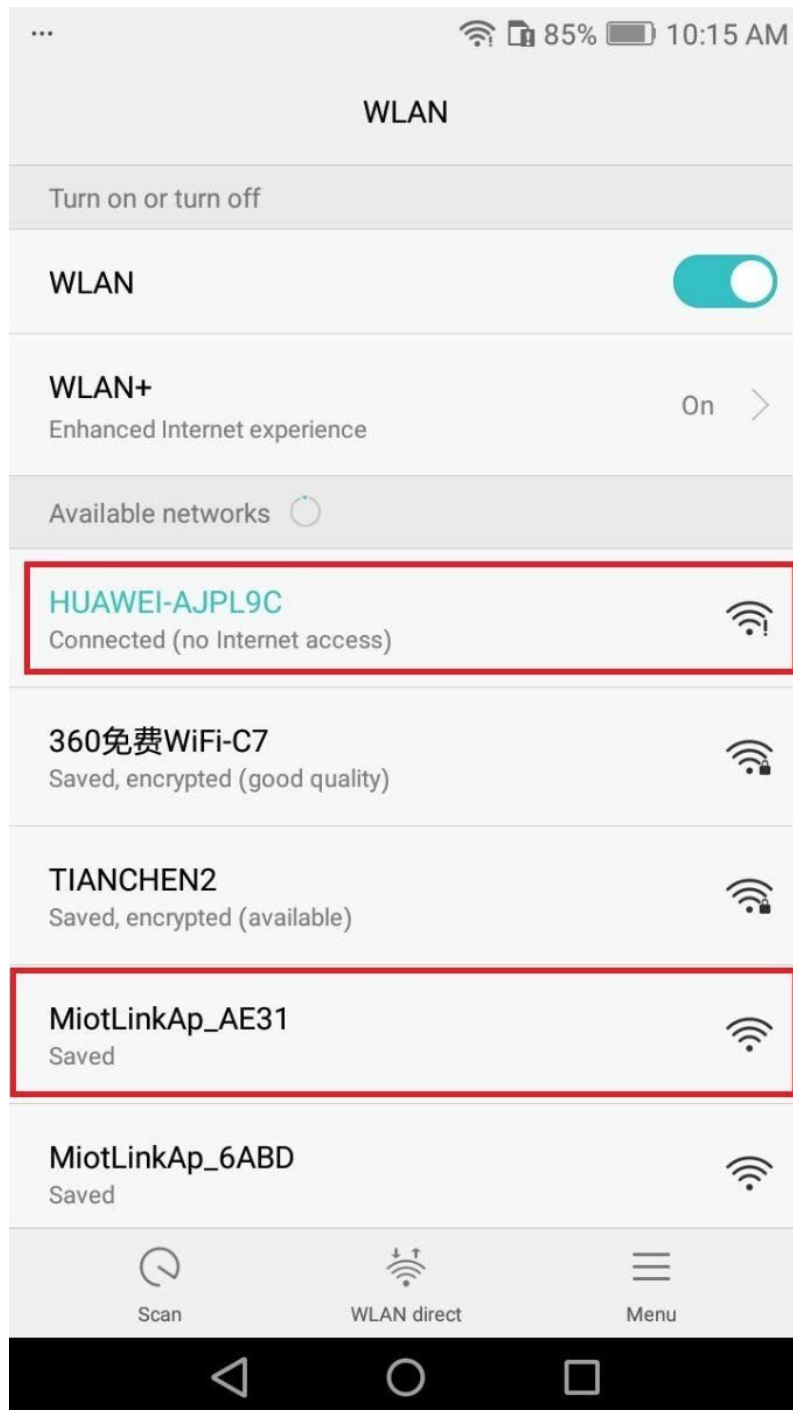

2:Open the App, click the symbol  on the right upper part as picture below

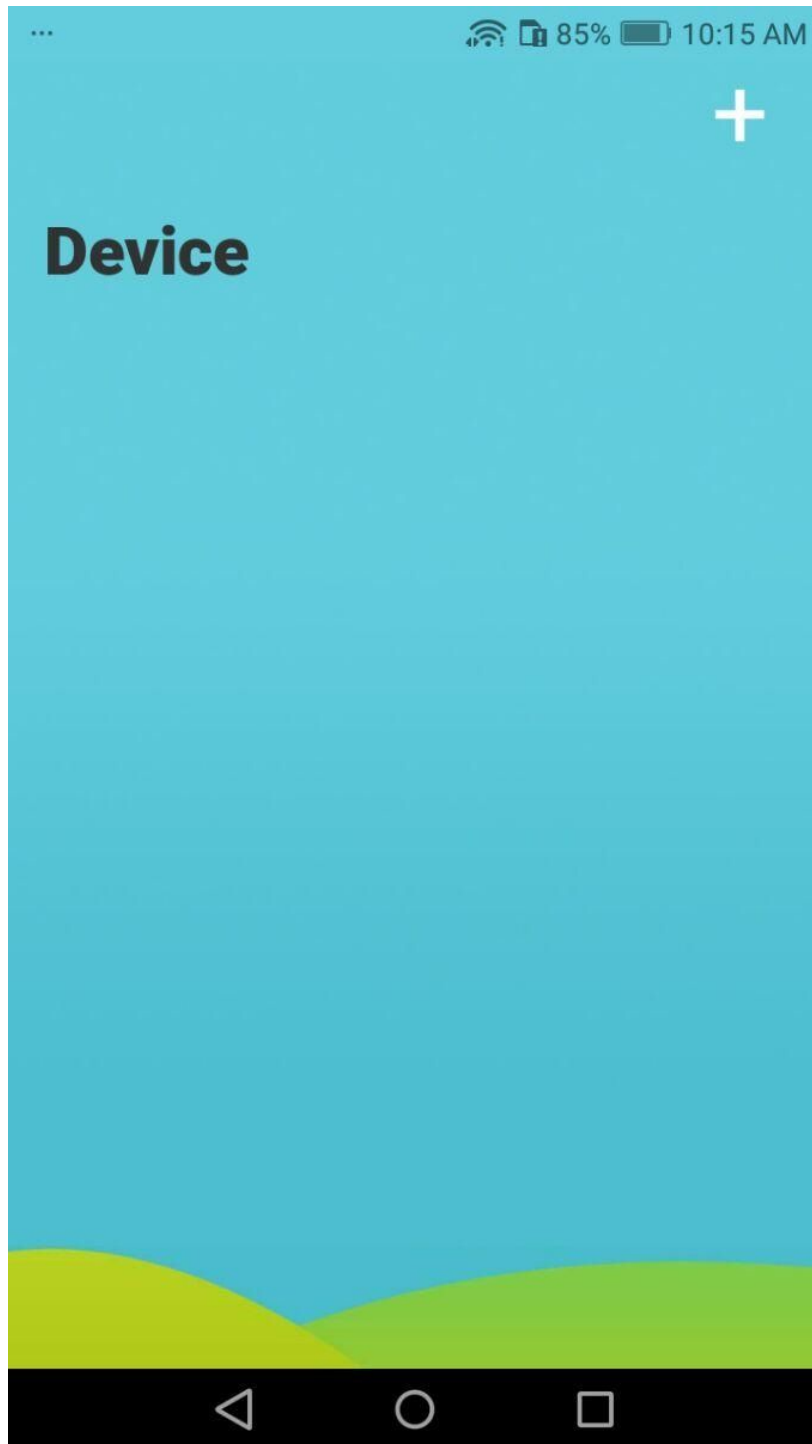


**3:Enter Device hotspot, find the device(MiotlinkAp-xxx) of robot lawn mower.  
(Note:Return to the previous page if can not find the device(MiotlinkAp-xxx),reenter and click  
"MiotLinkAp\_XXXX"after it shows. )**




## Device hotspot

MiotLinkAp\_AE31

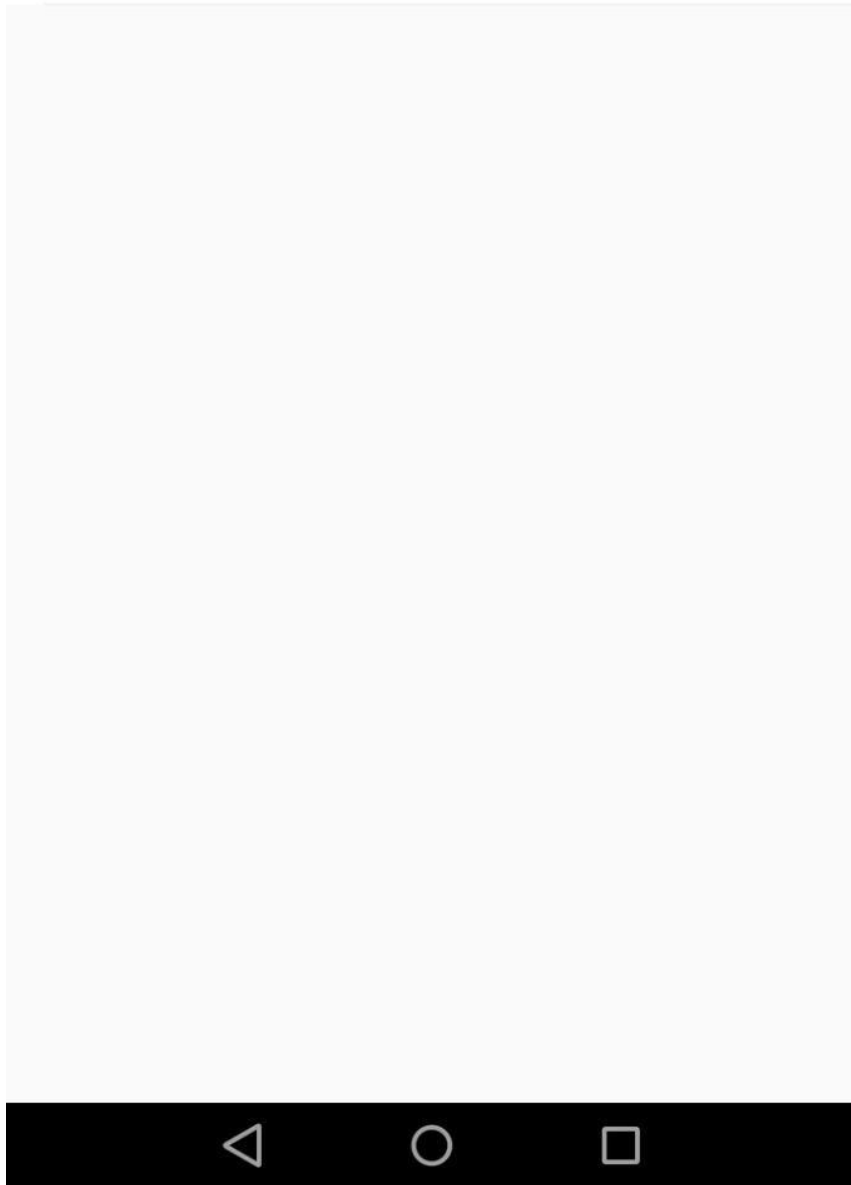

4:Input the password of local wifi network, click the next step as picture below:

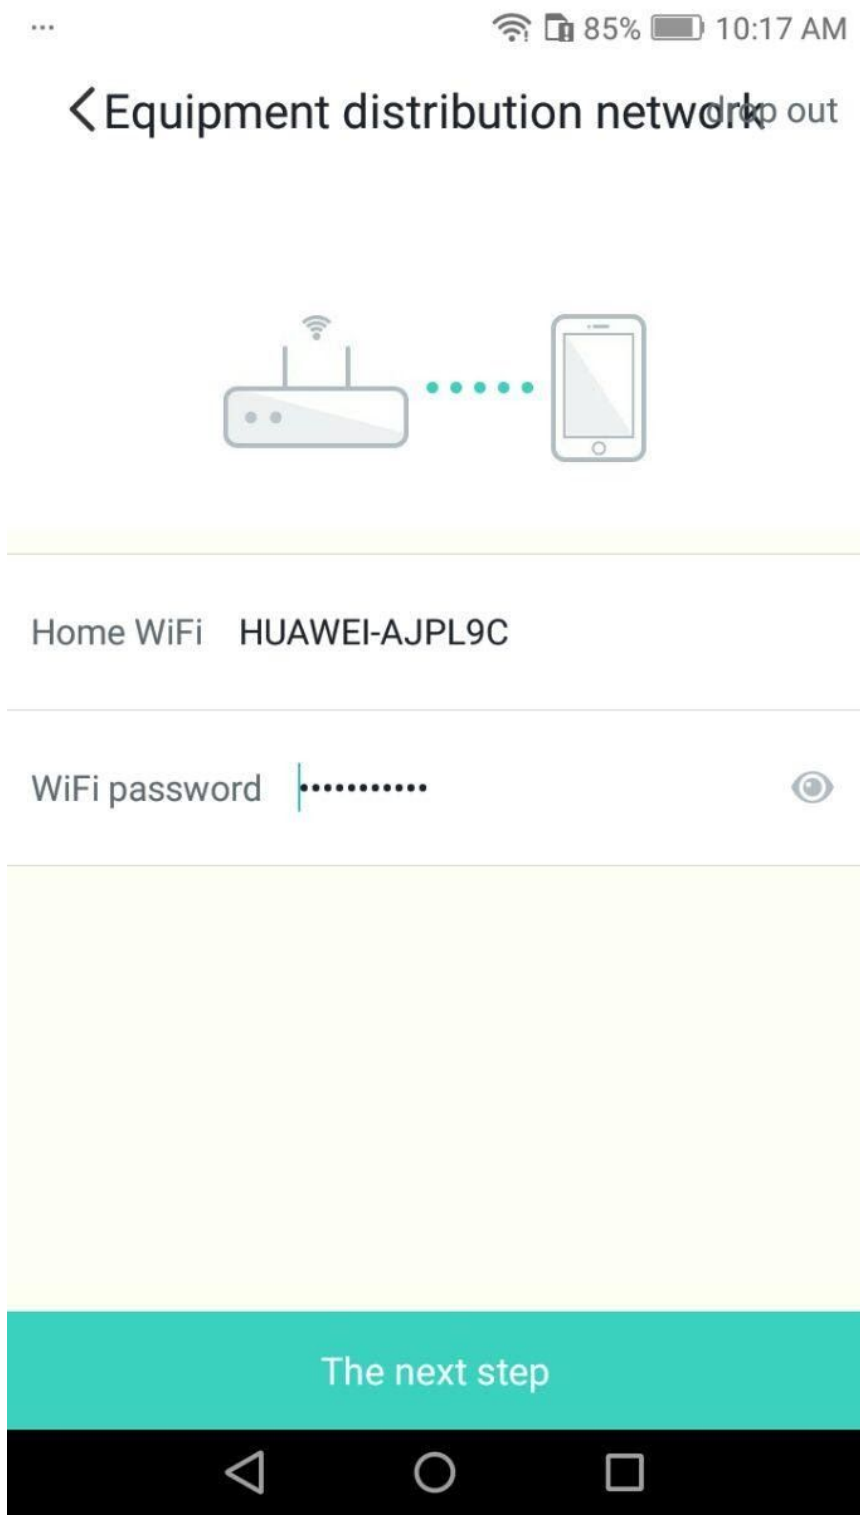

**5:Configuration starts:**

**Note:**“Distribution network”, this process requires a continuous switching of the connected network:LAN- MiotLinkAp\_XXXX-LAN, please do not interrupt this process.And do the configuration again if this process interrupted.


## Distributing network



Device is configuring

Try to get your router, device, and phone close to.

1 %

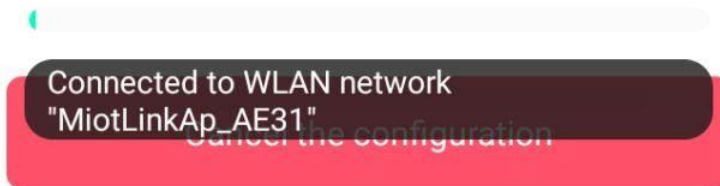


**6:Note:** Because of the variety of Android phones, some mobile phone with permissions can complete the configuration automatically, some are without permissions, need to switched the network manually. For example, appear the following network page, indicating the current connection of the network need to switch to MiotLinkAp\_XXXX" manually,click "Go to Settings Wi-fi phone", connect "MiotLinkAp\_XXXX", then back to APP EGROBOT.




1, manually connect to a Wi-Fi phone "MiotLinkAp\_AE31"

2, return "EGROBOT"

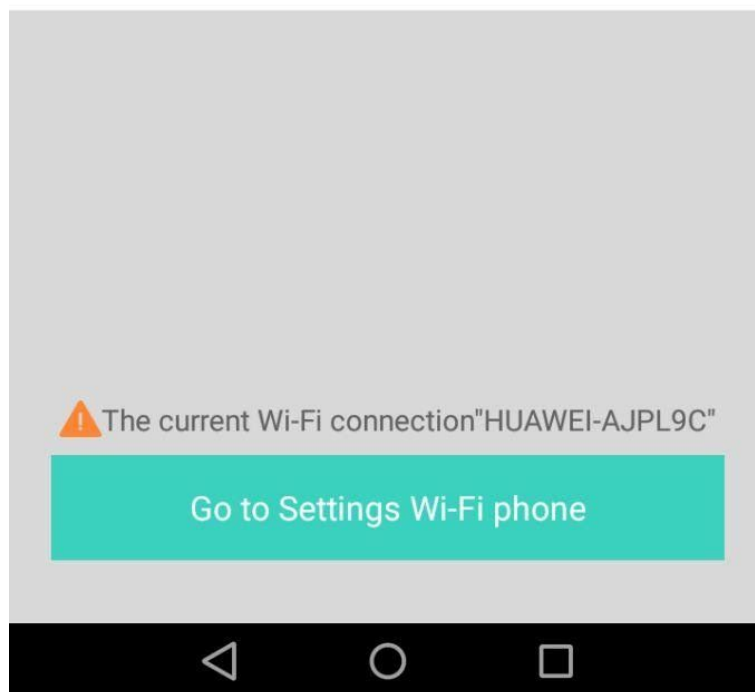

**7: Configuration starts:**


## Distributing network

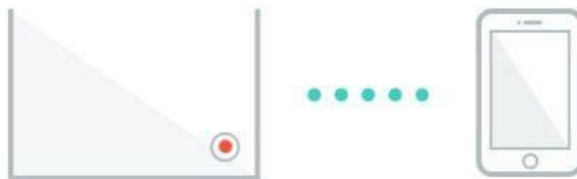

Device is configuring

Try to get your router, device, and phone close to.


9%



Cancel the configuration



8: Configuration completes after the Device "MiotLinkAp\_XXXX" shows.

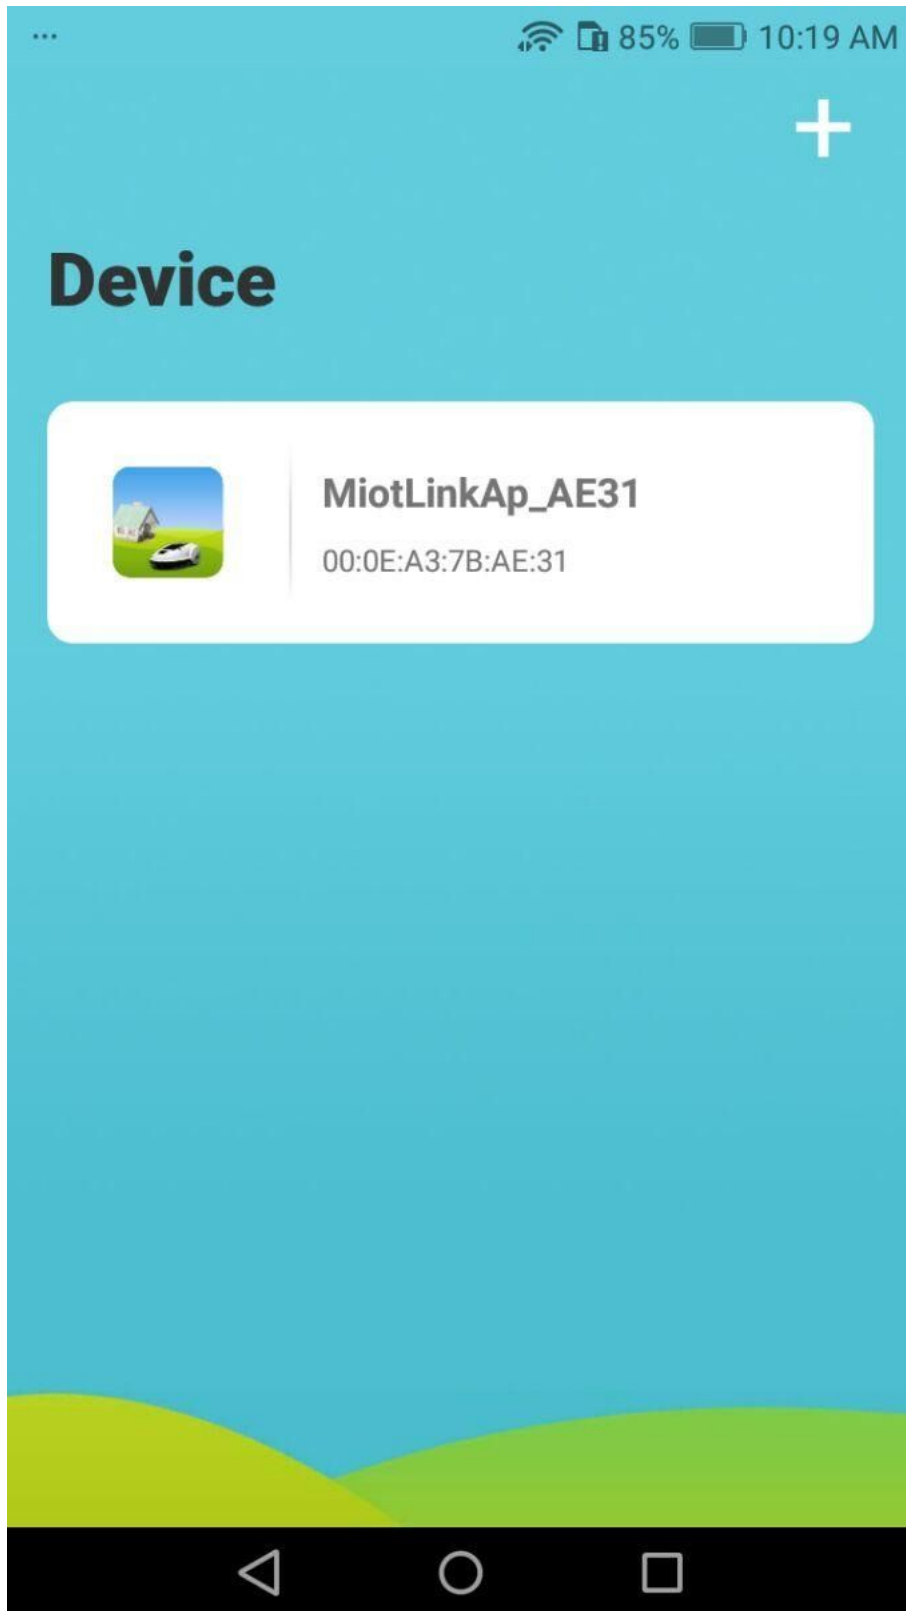

9:Restart the robot lawn mower ,and reenter the app installed and start using.

10:Note:

Mower has to do the initial setting before configuration if change to another local area network or can not find the device "MiotLinkAp\_XXXX".



Initial setting instruction:

E1600/E1600T/E1800:Display-set-function-initial-confirm yes-wait for 5 seconds-restart the mower.




**E1750/E1200:**

1: Turn on the main switch, rotate the emergency switch, mower with a beep sound,

power indicator light  is on constantly, signal light  and alarm indicator light

 both are on first, then off.

2: Press   two buttons at the same time with fast speed, then alarm indicator

light  starts flickering.

3: Press  to confirm, signal light  off, alarm indicator light  is on with 5 seconds, then off, turn off the mower then started again, the initial setting finished.